

COVER MATERIAL

14 GA. ST/ST #4 BRUSH FINISH W/ 1-1/8" PANNED EDGE

BUTTON VOLTAGE 120 V 48 V 24 V OTHER ___

PUSH BUTTON STYLE

PC1040 - PLASTIC (STD)

TR1100 - ST.ST. W/ 1-3/8" BLACK HALO

FIRE SERVICE

INCLUDES FIRE KEYSWITCH, FIRE HAT JEWEL

J217 - NATIONAL CODE 1996 2000

OTHER _____

NOT REQ'D (BLANK PLUGS FOR FUTURE)


NOTE: FIRE SERVICE KEYSWITCH & JEWEL MUST BE LOCATED WITHIN EXISTING BACK BOX SHOWN CENTERED AT 5 2" AFF

ENGRAVING

PHASE 1 FIRE INSTRUCTIONS

FIRE RECALL

ADDITIONAL INFORMATION (PLEASE SPECIFY)

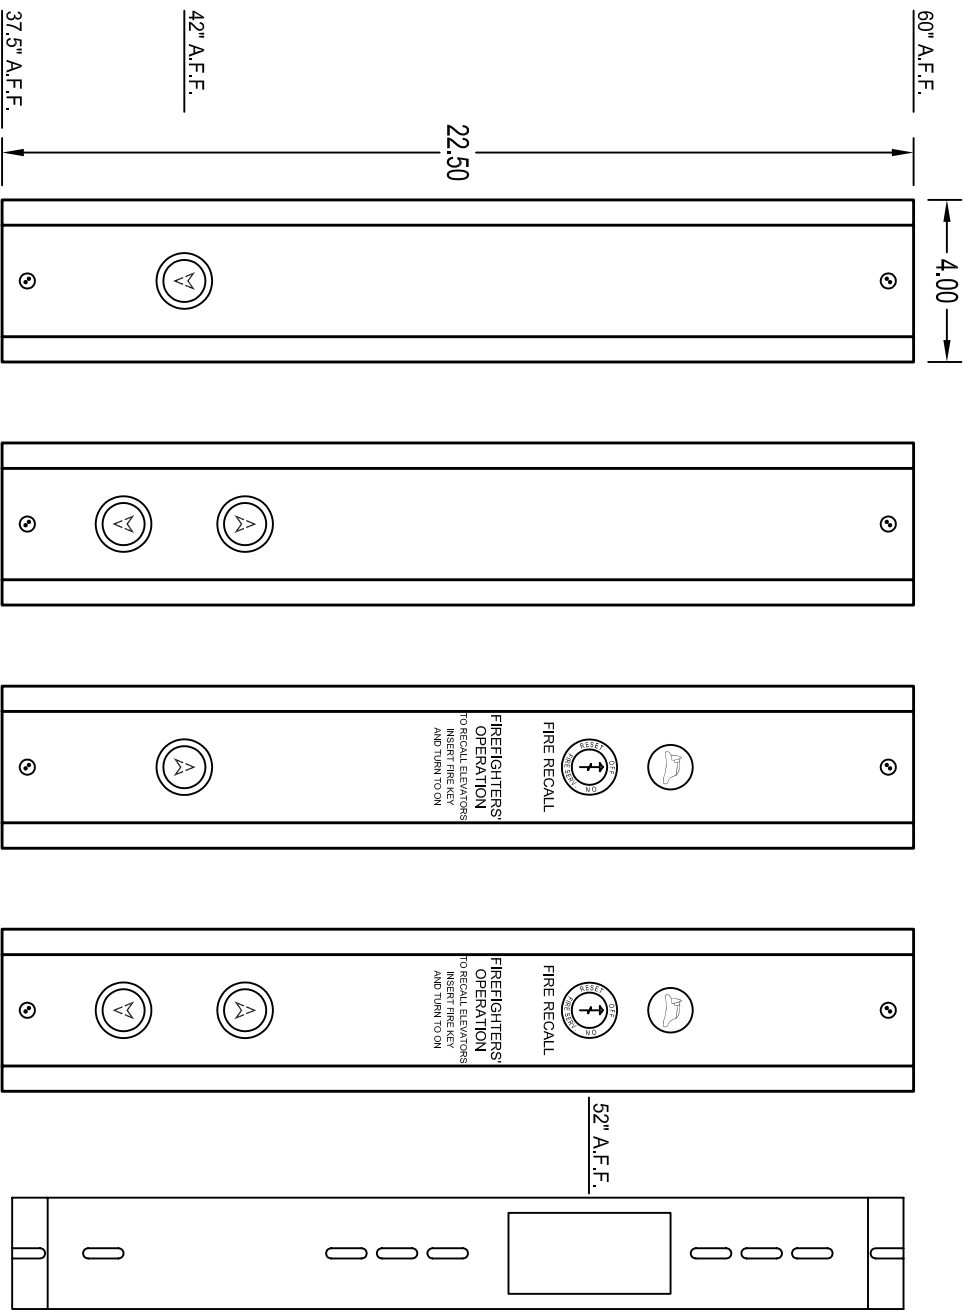


HSMT
QTY ___ UP
QTY ___ DN

HSMI
QTY ___

HSMTF
QTY ___ UP
QTY ___ DN

HSMIF
QTY ___



MONITOR CONTROLS Inc.
125 Ricefield Lane, Hauppauge, New York 11788

TOLERANCES	
DECIMAL	±.063
FRACTIONAL	1/32
ANGULAR	1/4°
CUSTOMER	
JOB REFERENCE	
CONTACT NAME	CONTACT PHONE
DRAWING NUMBER	DATE
PEP-ADA	ENGINEER