



Providing Passenger Safety that is Second to None

PANA40 PLUS



Pana 40 Plus


The Pana40 Plus is the most reliable safety edge on the market.

The Pana40 Plus from Janus Elevator Products protects your passengers by setting up a harmless curtain of infrared beams. Block a single beam and the door reopens. The beams are controlled by ultra-reliable electronic circuitry thus eliminating costly service calls associated with the traditional safety edge.


Features & Benefits

- FCC class A
- FCSA approved
- CSA approved
- Complies with ADA requirements.
- Quick installation-no adjustments.
- Easily serviced/Enhanced diagnostics.
- Complies with ASME/ANSI A17.1/A17.5.
- No moving parts-quieter doors, fewer call backs.
- Can be set to tolerate damage-keeps elevator in service.
- Full opening protection- screen fills doorway from ground level to six feet.
- Microprocessor fail-safe, holds doors safely open in the event of a failure.
- Reduces damage to elevator doors normally associated with freight movement.
- No alignment problems-Absolutely free from the problems associated with the condition of the doors, rollers, etc...


Janus Elevator Products Inc.

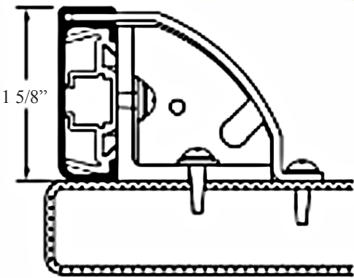

PANA40 Plus ONLY 1 5/8"

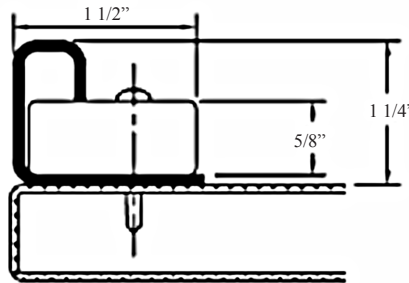

PANA40 Plus Slimline ONLY 5/8"

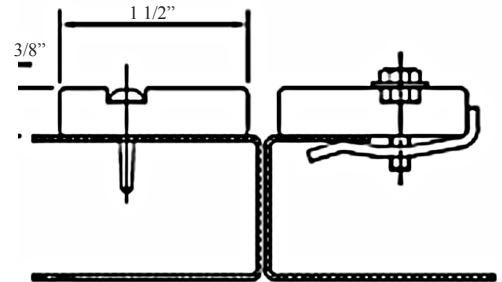

PANA40 Plus ULTRASLIM ONLY 3/8"



Power
Supply
Shown
at Left

Specifications

- 40 Beams or optional 194 criss-cross beams
- 1.8" Spacing Between Centers
- 20 feet Maximum Door Opening
- 0 Minimum Door Opening
- 72.0" Level of Highest Beam
- 0.75" Level of Lowest Beam
- 40ms Scanning Time
- 120 or 240 VAC, 11-25 VDC Power Input
- 240 VAC Optional
- 0.3 W Maximum Power Consumption
- Dry Relay, 240 VAC@5A or 24 VDC@5A Output
- 13 foot Cable Length



125 Ricefield Lane
Hauppauge, NY 11788
Phone: 631 864-3699 • 800 527-9156
Website: www.januselevator.com
E-mail: sales@januselevator.com

JANUS A HALMA COMPANY