



JANUS

SP150

Providing Passenger Safety that is Second to None



The SP150 from Janus Elevator Products protects your passengers by setting up a curtain of 154 criss-crossing beams. This safety edge offers you a IP65/NEMA 4 water and dust resistant edge at a competitive price. Suitable for dynamic or static installations, this unit is a good choice for quick and easy installation. With no on-site adjustments or special cables required.

Features & Benefits

- Competitively priced, high performance
- SP units are suitable for both side-opening or center-opening doors
- Suitable for dynamic or static installations
- IP65/NEMA 4 water and dust resistant
- 154 criss-cross beams
- No on-site adjustment required
- No special cables required
- Immune to interference from reflection or sunlight
- SMT electronics with proven technology and reliability
- Easy installation without need to expose componentry
- High impact vandal resistant materials
- Tested to CE requirements

SP150

The SP150 is the safety edge for your next installation.

SP150



Specifications


- 32 diodes 154 criss-crossing beams (5 way scanning)
- 10 feet Maximum Door Opening
- 0 Minimum Door Opening
- 72.0" Level of Highest Beam
- 0.98" Level of Lowest Beam
- Maximum response time 48mS
- Mounting brackets included



CENTER OPENING



SIDE OPENING

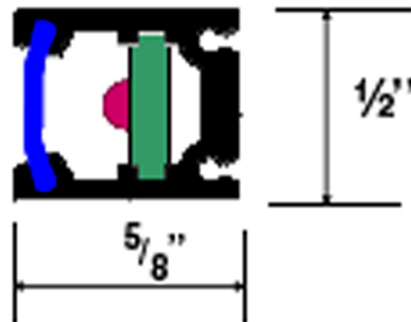

Power Supply Options

- Rated Voltage 100 / 240vac
- Output Voltage 12vdc regulated and short circuit protected
- Contact Type single pole change over, voltage free
- Contact rating 5A/250vac or 10A/24vdc



125 Ricefield Lane
Hauppauge, NY 11788
Phone: 631 864-3699 • 800 527-9156
Website: www.januselevator.com
E-mail: sales@januselevator.com

JANUS A HALMA COMPANY